

Data Sheet

RESINFLOW 60

Red extruded resin distribution medium

DESCRIPTION

Resinflow 60 is designed to assist resin flow through your part during the VARTM (Vacuum Assisted Resin Transfer Molding) process. Our resin distribution medium works well with polyester, vinylester and epoxy resins.

Resin flows more easily throughout your lay-up, when using Resinflow 60.

TECHNICAL DATA

Material type

LDPE/ HDPE blend

Color

Red

Configuration of net

Extruded

Maximum use temperature


212 °F (100 °C)

Mesh weight

4.72 oz/yd² (160 g/m²)

SIZES

Thickness	Width	Length
0.050 in (1.3 mm)	60 in (1.52 m)	350 ft (107 m)
0.050 in (1.3 mm)	60 in (1.52 m)	175 ft (53.5 m)

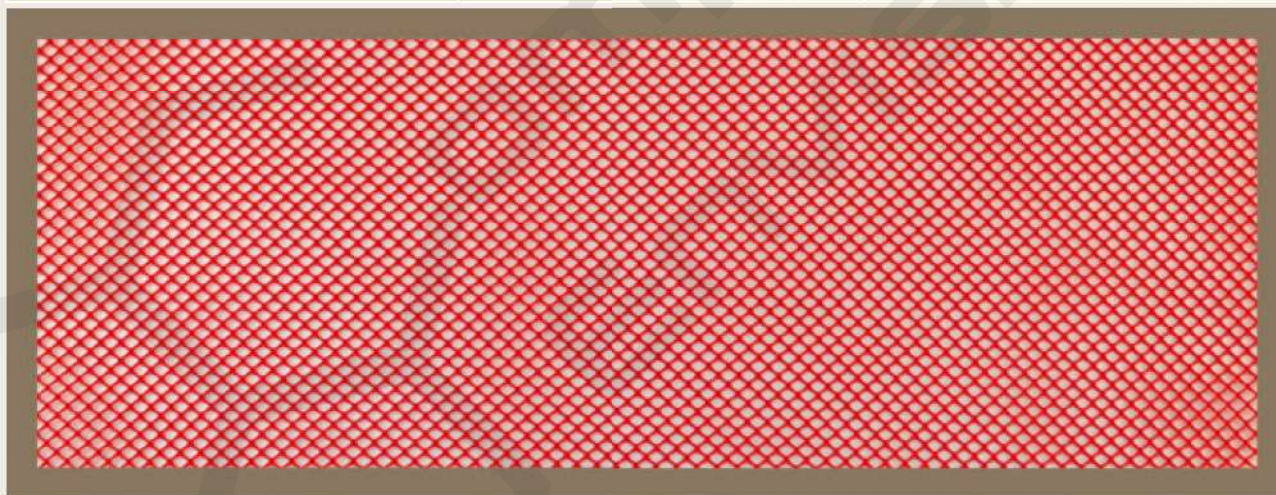

NOTES

This product does not fray when cut or roll up at the ends.

Last updated : 2013-01-18

Catalog position : **Resin infusion products**

As the conditions or methods of use, including storage, are beyond our control, Airtech International, Inc. does not assume responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech International, Inc. disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. Any translation is provided for your convenience only. The official language is English and the official law is California, USA.