




## CORDURA NYLON DWR URETHANE COATED 1050 DENIER MODEL #: F-2257-60

TEST UNIT OF MEASURE	TEST METHOD	TEST RESULTS
WEIGHT	ASTM D-3776	15.5 osy ± 5%
WIDTH (INCHES)	VISUAL	58/60"
WEAVE	VISUAL	Plain
YARN COUNT (IN)	VISUAL	Warp 44 Fill 42
BREAK STRENGTH	ASTM D-5034	Warp - 1020 Lbs. min Weft - 955 Lbs. min.
SHRINKAGE	AATCC 135	3%
CROCKING	AATCC 8	5 Wet / 5 Dry
SPRAY RATING	AATCC-2	100 - 100 - 90
Weave	2x2 Basket Weave	
Abrasion Resistance:	ASTM 388	Body Armor Test: Pass - No Hole after 800 cycles min.
Coating Weight	1.5oz - 1.75 oz.	

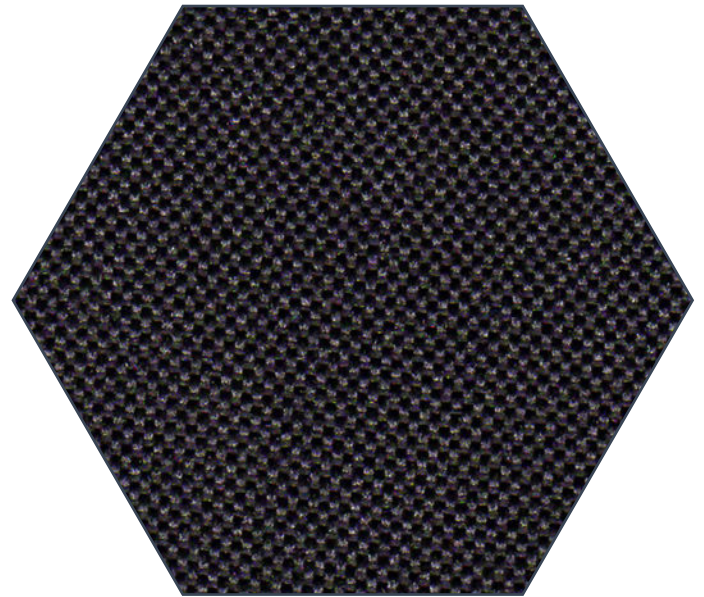

Information and data included in this data sheet is considered to be accurate and reliable to the best of our knowledge however it is not guaranteed to be so. It is the user/buyer's responsibility to determine for themselves the suitability of any material for a specific purpose and to adopt such safety precautions as may be necessary. Composite Envisions make no representations or warranties as to the results to be obtained in using any material. As Composite Envisions cannot foresee all conditions under which products will be used, user/buyer waives any claim against Composite Envisions for direct, indirect, consequential, or exemplary damages including without limitation, damage which may incur as a result of user/buyer's use or misuse of the product or the product's failure to perform to any expected performance level.

Composite Envisions LLC  
8450 Development Court  
Wausau, WI 54401 USA  
+1 715-842-0101  
info@compositeenvisions.com  
<https://compositeenvisions.com/>



**COMPOSITE  
ENVISIONS**