



TEXTREME® 5018 - HS UNI SPREAD TOW CARBON FIBER TAPE 12K MODEL #: F-2335-20MM

TEXTREME 5018

TEXTREME 80 UD UTS50 WO / 20:80

SPREAD TOW TAPE SPECIFICATION

Fiber: UTS50 12K F22 S / 80 gsm


Sizing: Epoxy compatible

Stablizing material: NM688 / 5gsm

Total fiber weight: 80gsm

Width of tape: 20mm

Thickness of one play laminate @ 60% Vf:
0.080mm

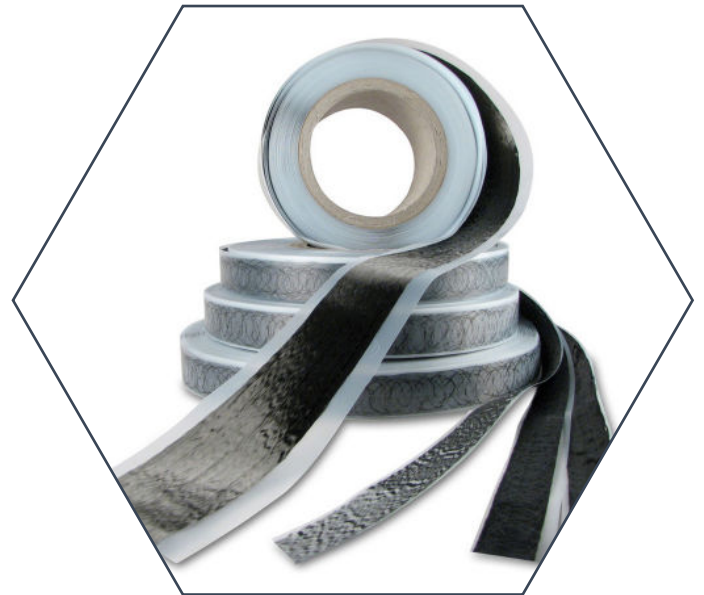

Information and data included in this data sheet is considered to be accurate and reliable to the best of our knowledge however it is not guaranteed to be so. It is the user/buyer's responsibility to determine for themselves the suitability of any material for a specific purpose and to adopt such safety precautions as may be necessary. Composite Envisions make no representations or warranties as to the results to be obtained in using any material. As Composite Envisions cannot foresee all conditions under which products will be used, user/buyer waives any claim against Composite Envisions for direct, indirect, consequential, or exemplary damages including without limitation, damage which may incur as a result of user/buyer's use or misuse of the product or the product's failure to perform to any expected performance level.

Composite Envisions LLC
8450 Development Court
Wausau, WI 54401 USA
+1 715-842-0101
info@compositeenvisions.com
<https://compositeenvisions.com/>



COMPOSITE ENVISIONS