



# HiMax™ CGL4026

## FCIM253 [C12k, 200, +45/-45]



Product Data Sheet

### Fabric Construction

Fibre Type: Carbon  
 Construction: +45/-45  
 Fabric Weight: 204 gsm +/- 5%

### Stitching Fibre

Stitching Thread: Texturised Polyester BI  
 Stitch DTex: 35  
 Stitch Gauge: 6.0 gg  
 Stitch Length: 2.12 mm  
 Stitch Type: Pillar  
 Stitch Weight: 4 gsm


### Ply Construction

#### Layer 2: +45°

Fibre Specification: 12k standard modulus carbon  
 Fibre Tex: 800 tex  
 Gauge: 2.23 gg  
 Ply Weight: 99 gsm

#### Layer 1: -45°

Fibre Specification: 12k standard modulus carbon  
 Fibre Tex: 800 tex  
 Gauge: 2.23 gg  
 Ply Weight: 99 gsm

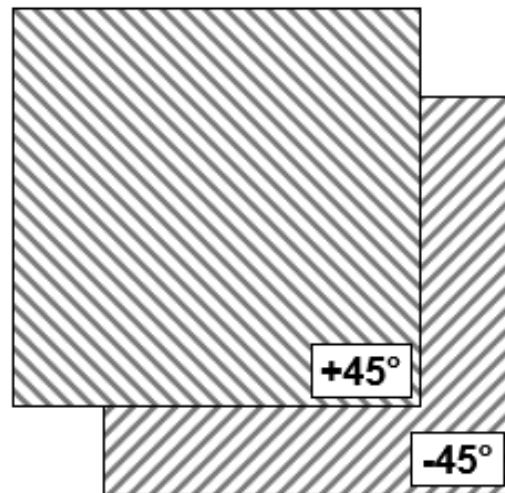

### Customisation

Customer Code and Description:	Customer Specified
Fabric Width:	1270mm (+/- 5mm) - or tapes on application
Tracer Threads / Tapered Edges:	Customer Specified
Approved Fibres:	On Application
Roll Weight / Length:	Customer Specified
Cardboard Core:	Customer Specified
Packaging:	Customer Specified



# HiMax™ CGL4026

FCIM253 [C12k, 200, +45/-45]



Product Data Sheet

## For more information

Hexcel is a worldwide supplier of composite materials to aerospace and industrial markets. Our comprehensive range includes:

- HexTow® carbon fibres
- HexForce® reinforcements
- HiMax™ non-crimp fabrics
- HexPly® prepregs
- HexMC® moulding compounds
- HexFlow® RTM resins
- Redux® adhesives
- HexTool® tooling materials
- HexWeb® honeycombs
- Acousti-Cap® sound attenuating honeycomb
- Engineered core
- Engineered products