



# HiMax™ GGL5729

## FGE727 [GE, 1200, 0, MX]



Product Data Sheet

### Fabric Construction

Fibre Type: E-Glass  
 Construction: 0  
 Fabric Weight: 1220 gsm +/- 5%

### Stitching Fibre

Stitching Thread: Texturised Polyester  
 Stitch DTex: 78  
 Stitch Gauge: 6.0 gg  
 Stitch Length: 3.33 mm  
 Stitch Type: 1/2 Pillar Tricot  
 Stitch Weight: 6 gsm

### Ply Construction

0°


Fibre Specification: E-Glass  
 Fibre Tex: 4800 tex  
 Gauge: 6 gg  
 Ply Weight: 1198 gsm

+45°

Fibre Specification: E-Glass  
 Fibre Tex: 68 tex  
 Gauge: 2 gg  
 Ply Weight: 8 gsm

-45°

Fibre Specification: E-Glass  
 Fibre Tex: 68 tex  
 Gauge: 2 gg  
 Ply Weight: 8 gsm

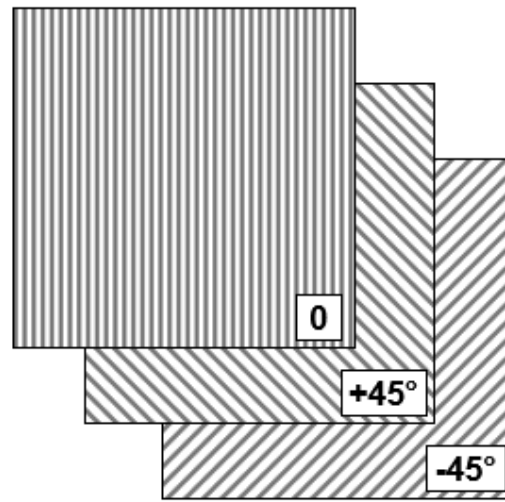

### Customisation

Customer Code and Description:	Customer Specified
Fabric Width:	1250mm (+/- 5mm) - or tapes on application
Tracer Threads / Tapered Edges:	Customer Specified
Approved Fibres:	On Application
Roll Weight / Length:	Customer Specified
Cardboard Core:	Customer Specified
Packaging:	Customer Specified



# HiMax™ GGL5729

FGE727 [GE, 1200, 0, MX]



Product Data Sheet

## For more information

Hexcel is a worldwide supplier of composite materials to aerospace and industrial markets. Our comprehensive range includes:

- HexTow® carbon fibres
- HexFlow® RTM resins
- Acousti-Cap® sound attenuating honeycomb
- HexForce® reinforcements
- Redux® adhesives
- Engineered core
- HiMax™ non-crimp fabrics
- HexTool® tooling materials
- Engineered products
- HexPly® prepregs
- HexWeb® honeycombs
- HexMC® moulding compounds

For quotes, orders and product information call +44 116 275 2200. For other worldwide sales office telephone numbers and a full address list, please go to:

<http://www.hexcel.com/contact/salesoffice>